

PLASTIC FILTER SYSTEM



Maximum Working Pressure

250kpa/36ps i (2. 0bar)

Maximum Temperature

50°C (122F)

Factory Testing Pressure

400kpa/58ps i (4. 0bar)

Size of Gravel

0. 5mm~0. 8mm

- Fast and easy to install .

- Specifically sized filter and pump combination.


- Large pump strainer basket to extend service

- Union connections for quick installation and servicing.

- Unified pump/filter base for secure system installation.

Model	Filter Diameter (mm)	Filter Height (mm)	Design Flow (m³/h)	Filter Area (m²)	Connections (inch/mm)	Sand Weight (kg)	Matching Pump
EB350	350	745	5	0.10	1.5"/50	25	STP35
EB400	400	770	6	0.13	1.5"/50	30	STP50
EB450	450	815	8	0.16	1.5"/50	45	STP75
EB500	530	860	10	0.20	1.5"/50	85	STP100
EB650	630	960	15	0.32	1.5"/50	150	SMP150
EB700	700	1030	19	0.38	1.5"/50	200	SMP150

Model	EB350	EB400	EB450	EB500	EB650	EB700
ØD(mm)	350	400	450	530	630	700
H(mm)	745	770	815	860	960	1030
A(mm)	485	510	555	600	700	770
P(mm)	575	575	710	710	770	870
T(mm)	150	160	220	260	370	450

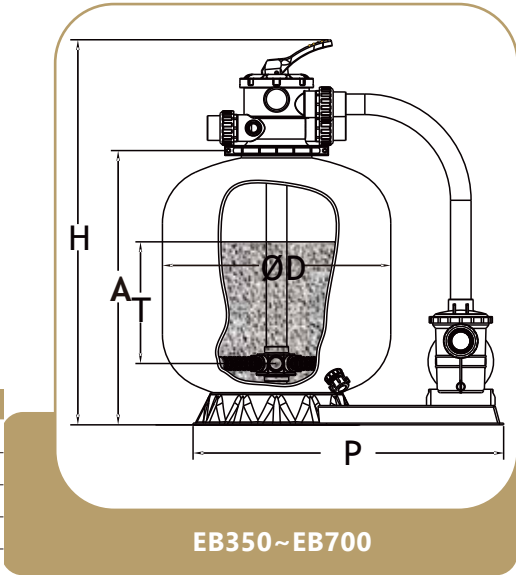

EB350~EB700



Maximum Working Pressure

250kpa/36ps i (2. 0bar)

Factory Testing Pressure

400kpa/58ps i (4. 0bar)

Maximum Temperature

50°C (122F)

Size of Gravel

0. 5mm~0. 8mm

- Fast and easy to install .

- Specifically sized filter and pump combination.

- Large pump strainer basket to extend service periods.


- Union connections for quick installation and servicing.

- Unified pump/filter base for secure system installation.

- Enconomic 4-way valve suitable for 14"~28" top mount filters.

Model	Filter Diameter (mm)	Filter Height (mm)	Design Flow (m³/h)	Filter Area (m²)	Connections (inch/mm)	Sand Weight (kg)	Matching Pump
EBF350	350	645	5	0.10	1.5"/50	25	STP35
EBF400	400	670	6	0.13	1.5"/50	30	STP50
EBF450	450	715	8	0.16	1.5"/50	45	STP75
EBF500	530	760	10	0.20	1.5"/50	85	STP100
EBF650	630	860	15	0.32	1.5"/50	150	SMP150
EBF700	700	930	19	0.38	1.5"/50	200	SMP150

Model	EBF350	EBF400	EBF450	EBF500	EBF650	EBF700
ØD(mm)	350	400	450	530	630	700
H(mm)	645	670	715	760	860	930
A(mm)	485	510	555	600	700	770
B(mm)	73	73	75	75	95	95
M(mm)	565	570	615	660	760	830
ØP(mm)	575	575	710	710	770	870
T(mm)	150	160	220	260	370	450

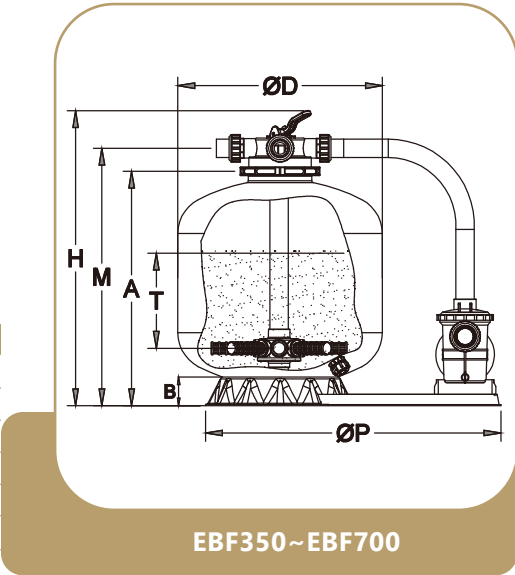

EBF350~EBF700

FIBERGLASS WITH PLASTIC
FILTER SYSTEM

EBW



Maximum Working Pressure
250kpa/36ps i (2. 0bar)

Maximum Temperature
50°C (122F)


Factory Testing Pressure
400kpa/58ps i (4. 0bar)

Size of Gravel
0. 5mm~0. 8mm

- Fast and easy to install .
 - Specifically sized filter and pump combination.
 - Large pump strainer basket to extend service
- Union connections for quick installation and servicing.
 - Integrated design safety base.

Model	Filter Diameter (mm)	Filter Height (mm)	Design Flow (m³/h)	Filter Area (m²)	Connections (inch/mm)	Sand Weight (kg)	Matching Pump
EBW350	350	745	5	0.10	1.5"/50	25	STP35
EBW400	400	770	6	0.13	1.5"/50	30	STP50
EBW450	450	815	8	0.16	1.5"/50	45	STP75
EBW500	530	860	10	0.20	1.5"/50	85	STP100
EBW650	630	960	15	0.32	1.5"/50	150	SMP150
EBW700	700	1030	19	0.38	1.5"/50	200	SMP150

Model	EBW350	EB4W00	EBW450	EBW500	EBW650	EBW700
ØD(mm)	350	400	450	530	630	700
H(mm)	745	770	815	860	960	1030
A(mm)	485	510	555	600	700	770
P(mm)	575	575	710	710	770	870
T(mm)	150	160	220	260	370	450

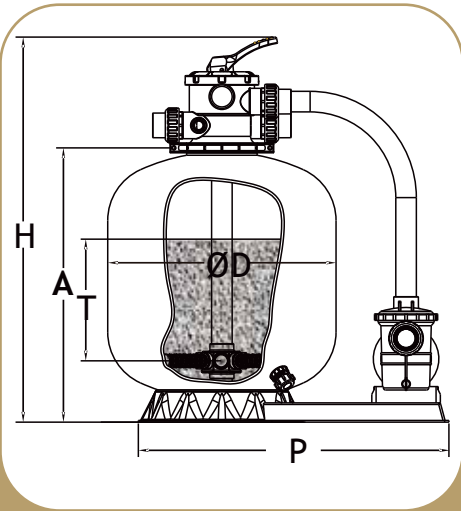

EBW350~EBW700

EBWF



Maximum Working Pressure
250kpa/36ps i (2. 5bar)

Factory Testing Pressure
400kpa/58ps i (4. 0bar)


Maximum Temperature
50°C (122F)

Size of Gravel
0. 5mm~0. 8mm

- Fast and easy set-up, ready to install .
 - Specifically sized filter and pump combination.
 - The hair collecting basket of the water pump prolongs the service life.
- Union connections for quick installation and servicing.
 - Integrated design safety base.
 - Enconomic 4-way valve suitable for 14"~28" top mount filters.

Model	Filter Diameter (mm)	Filter Height (mm)	Design Flow (m³/h)	Filter Area (m²)	Connections (inch/mm)	Sand Weight (kg)	Matching Pump
EBWF350	350	645	5	0.10	1.5"/50	25	STP35
EBWF400	400	670	6	0.13	1.5"/50	30	STP50
EBWF450	450	715	8	0.16	1.5"/50	45	STP75
EBWF500	530	760	10	0.20	1.5"/50	85	STP100
EBWF650	630	860	15	0.32	1.5"/50	150	SMP150
EBWF700	700	930	19	0.38	1.5"/50	200	SMP150

Model	EBWF350	EBWF400	EBWF450	EBWF500	EBFW650	EBWF700
ØD(mm)	350	400	450	530	630	700
H(mm)	645	670	715	760	860	930
A(mm)	485	510	555	600	700	770
B(mm)	73	73	75	75	95	95
M(mm)	565	570	615	660	760	830
ØP(mm)	575	575	710	710	770	870
T(mm)	150	160	220	260	370	450

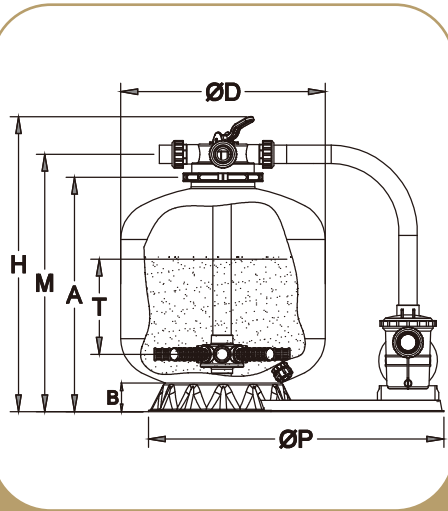

EBWF350~EBWF700

FIBERGLASS SAND FILTER SYSTEM

KB



Maximum Working Pressure

250kpa/36ps i (2. 0bar)

Maximum Temperature

50℃ (122F)

Factory Testing Pressure

400kpa/58ps i (4. 0bar)


Size of Gravel

0. 5mm~0. 8mm (石英砂)

- Fast and easy to install .
 - Specifically sized filter and pump combination.
 - Large pump strainer basket to extend service periods.
- Union connections for quick installation and servicing.
 - Unified pump/filter base for secure system installation.

Model	Filter Diameter (mm)	Filter Height (mm)	Design Flow (m³/h)	Filter Area (m²)	Connections (inch/mm)	Sand Weight (kg)	Matching Pump
KB400	400	750	6	0.13	1.5"/50	30	STP50
KB450	450	810	8	0.16	1.5"/50	45	STP75
KB500	530	870	10	0.20	1.5"/50	80	STP100
KB650	630	870	15	0.32	1.5"/50	130	SMP150
KB700	700	960	19	0.38	1.5"/50	190	SMP150

Model	KB400	KB450	KB500	KB650	KB700
ØD(mm)	400	450	530	630	700
H(mm)	750	810	870	890	960
A(mm)	500	560	620	640	710
P(mm)	575	710	710	770	870
T(mm)	160	230	260	300	400

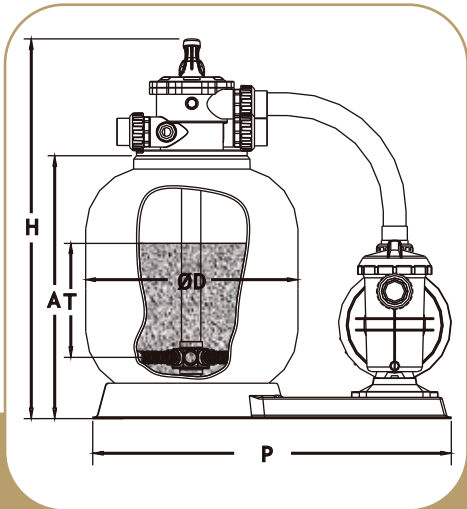

KB400~KB700