

- **High self-priming**





# PMB SERIES SELF-PRIMING POOL PUMP

PMB



- Using special materials with superior pressure up to 7kg/cm<sup>2</sup>.
- High temperature resistant to 70°C.
- High quality impeller and mechanical seal suitable for long-time use.
- Basket is easy to take out and install.
- Ultra quiet and IP55 water proof.
- Innovative design and high self-priming.
- Suitable for commercial pool.

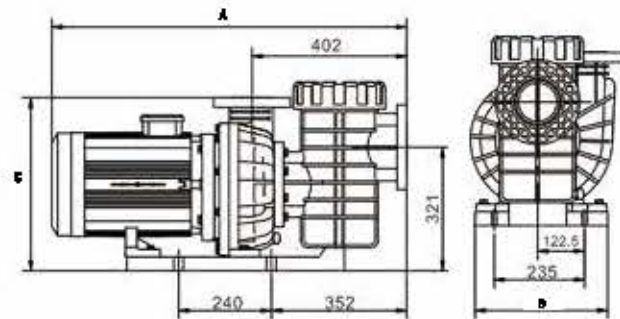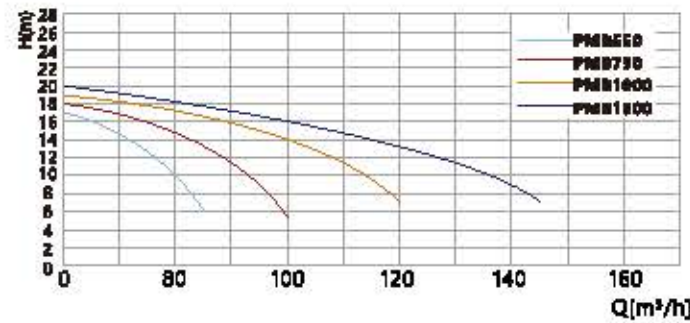



Model	Motor Power (HP)	Voltage (V)	Frequency (Hz)	Qmax (m <sup>3</sup> /h)	Hmax (mtr)	Inlet diameter (mm)	Outlet diameter (mm)	A (mm)	B (mm)	C (mm)
PMB550	5.5	380	2900	85	17	110	90	855	345	450
PMB750	7.5	380	2900	100	18	110	90	870	345	450
PMB1000	10.0	380	2900	120	19	110	90	870	345	450
PMB1500	15.0	380	2900	145	20	110	90	905	345	450

# PM SERIES SELF-PRIMING POOL PUMP

PM



- Using special materials with superior pressure up to 7kg/cm<sup>2</sup>.
- High temperature resistant to 70°C.
- High quality impeller and mechanical seal suitable for long-time use.
- Basket is easy to take out and install.
- Ultra quiet and IP55 water proof.
- Innovative design and high self-priming.
- Suitable for small pool and spa pool.

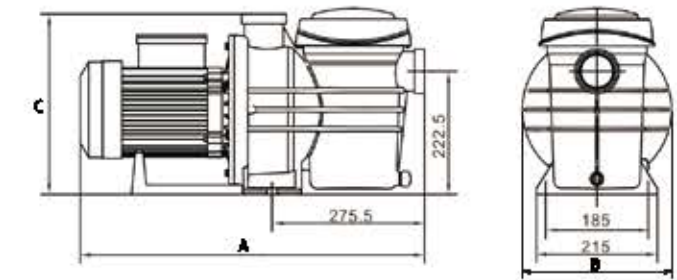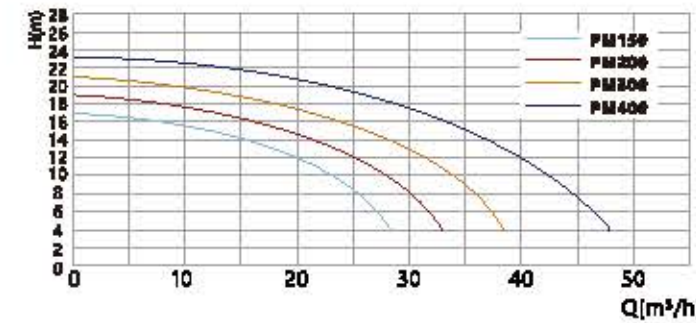

Model	Motor Power (HP)	Voltage (V)	Frequency (Hz)	Qmax (m <sup>3</sup> /h)	Hmax (mtr)	Connections (mm)	A (mm)	B (mm)	C (mm)
PM150	1.5	220	2900	28	17	60/63	640	219	326
PM200	2.0	220	2900	33	19	60/63	640	219	326
PM300	3.0	220-380	2900	38	21	60/63	640	219	326
PM400	4.0	380	2900	48	23	60/63	640	219	326